

Effect of Radiation on the Thermal Performance of Triangular-Fin Heat Sinks

Dehai Liu^{1*}, Qing Li¹ and Grant P Steven²

¹School of Aerospace, Mechanical and Mechatronics Engineering, University of Sydney, Australia

*Email: dliu5524@uni.sydney.edu.au

Triangular-fin heat sinks are investigated for lightweight, compact CPU thermal management in constrained enclosures dominated by natural convection. A persistent deficiency in fin-array modelling is the omission or surrogate treatment of inter-fin radiative exchange via view factors; prior evidence indicates that neglecting radiation view factors in fin arrays “should be prohibited,” as the error may exceed that of omitting radiation altogether [1]. Graduate-level investigations of natural-convection fin arrays further show that buoyancy-driven transport is acutely sensitive to spacing, interruptions and tip shape, implying that radiation–convection coupling is geometry dependent [2]. From a least-material perspective, triangular profiles are especially attractive for compact CPU heat sinks and motivate explicit treatment of geometry–emissivity interactions in design [3]. In high-emissivity enclosures typical of motherboard–chassis assemblies, surface radiation can compete with and suppress buoyant driving, reshaping plumes and the convective pathway [4]. Classical guidance on triangular fins underscores the heat-dissipation-per-volume advantage relative to rectangular profiles, reinforcing the material-efficiency motivation for Triangular-fin heat sinks in CPU cooling [5].

We develop a computational conjugate heat-transfer framework in ANSYS Fluent tailored to CPU scenarios, representing the die as a volumetric heat source with realistic boundary conditions. The fluid field solves the incompressible Navier–Stokes and energy equations with Boussinesq buoyancy; simulations run in both steady-state and transient modes to capture plume unsteadiness in natural convection. Surface-to-surface radiation is modelled with a gray, diffuse radiosity–view-factor formulation; the configuration-factor matrix satisfies reciprocity/closure and the net radiative heat flux couples to the energy equation at fin surfaces. Crucially, the fins are constructed from anisotropic graphite and represented by a full thermal-conductivity tensor oriented with the fin principal axes; in contrast to isotropic graphite, this formulation reflects substantially elevated axial (streamwise) and in-plane conductivities with respect to the cross-plane component. This allows us to quantify how directional conduction modifies fin temperature gradients, inter-fin radiosity paths, and the balance between radiation and buoyancy. The design space spans fin pitch, fin height, tip angle, array-to-wall spacing, surface emissivity. Performance measures include base-to-ambient thermal resistance, spatially averaged convective heat-transfer coefficient, temperature field uniformity, and heat removal per unit fin volume/mass; mesh-independence, domain-extent, and continuum-validity checks are documented. Verification recovers view-factor sensitivity in straight-fin arrays [1] and radiation–buoyancy interaction in enclosures [4], while least-material insights [3] and textbook guidance on triangular fins [5] frame interpretation for CPU-relevant trade-offs.

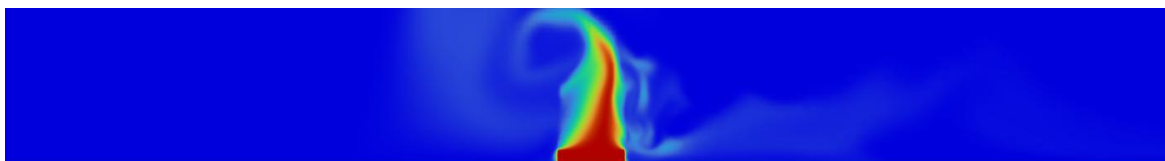


Figure 1. Temperature contour plot on the side of the heat sink

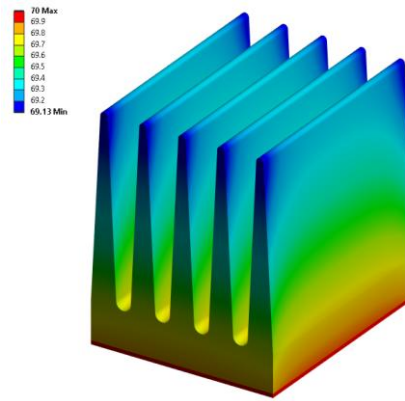


Figure 2. Temperature contour plot on the surface of the heat sink

REFERENCES

- [1] Khor, C. Y., Hung, Y. M., & Lim, K. S. (2010). On the role of radiation view factor in thermal performance of straight-fin heat sinks for electronics cooling under natural convection. *International Communications in Heat and Mass Transfer*, 37(9), 1090–1094. <https://doi.org/10.1016/j.icheatmasstransfer.2010.06.012>
- [2] Mostafavi, G. (2019). Natural convection heat transfer from interrupted rectangular fins (Master's thesis, Simon Fraser University).
- [3] Iyengar, M., & Bar-Cohen, A. (1998). Least-material optimization of vertical pin-fin, plate-fin, and triangular-fin heat sinks in natural convective heat transfer. In *Proceedings of the Intersociety Conference on Thermal and Thermomechanical Phenomena in Electronic Systems (ITHERM 1998)* (pp. 295–302). IEEE.
- [4] Ramesh, N., Balaji, C., & Venkateshan, S. P. (2001). Interaction of surface radiation with natural convection. In K. Vajravelu (Ed.), *Differential Equations and Nonlinear Mechanics* (pp. 309–338). Springer. https://doi.org/10.1007/978-1-4613-0277-3_22.
- [5] Incropera, F. P., DeWitt, D. P., Bergman, T. L., & Lavine, A. S. (2007). *Fundamentals of Heat and Mass Transfer* (6th ed.). John Wiley & Sons. (see p. 153).